


VASCA IN ACRILICO DX 140X70


ACRYLIC BATHTUB RX 140X70

DATI TECNICI


TECHNICAL INFO

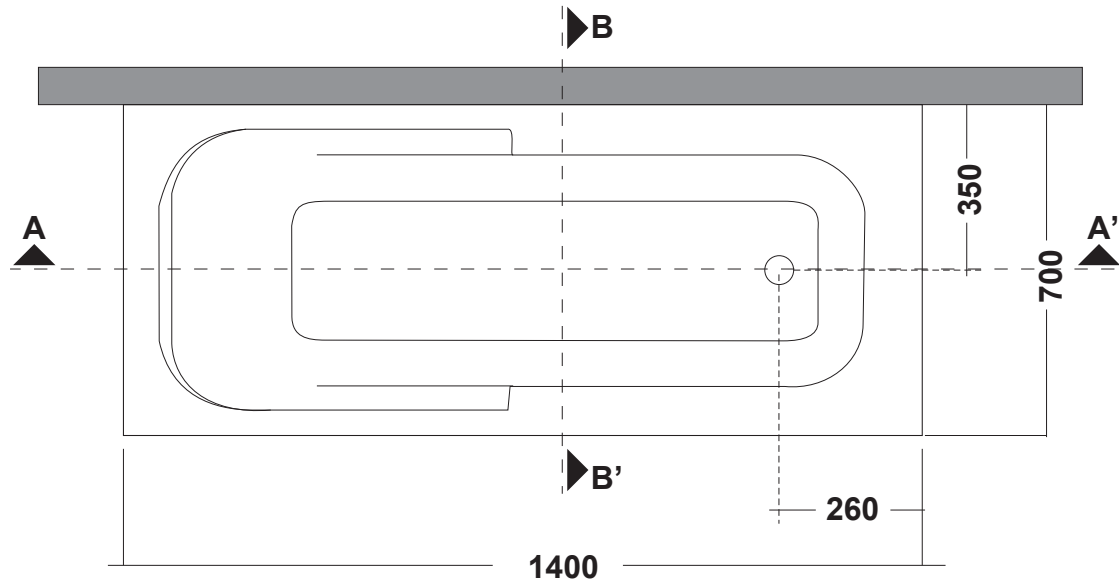


Vista in pianta
plan view

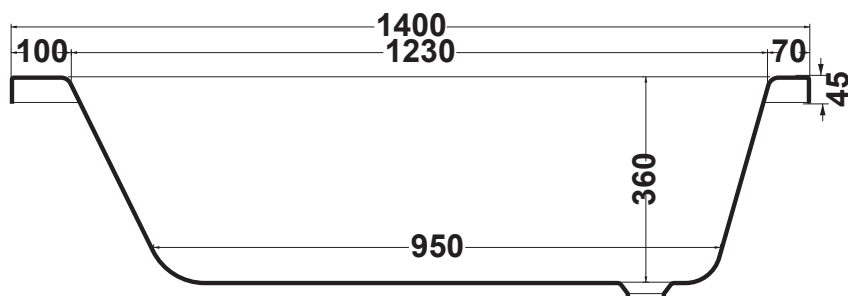

Sezione A/A'
Section A/A'

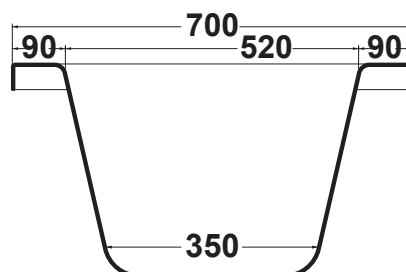

Sezione B/B'
Section B/B'

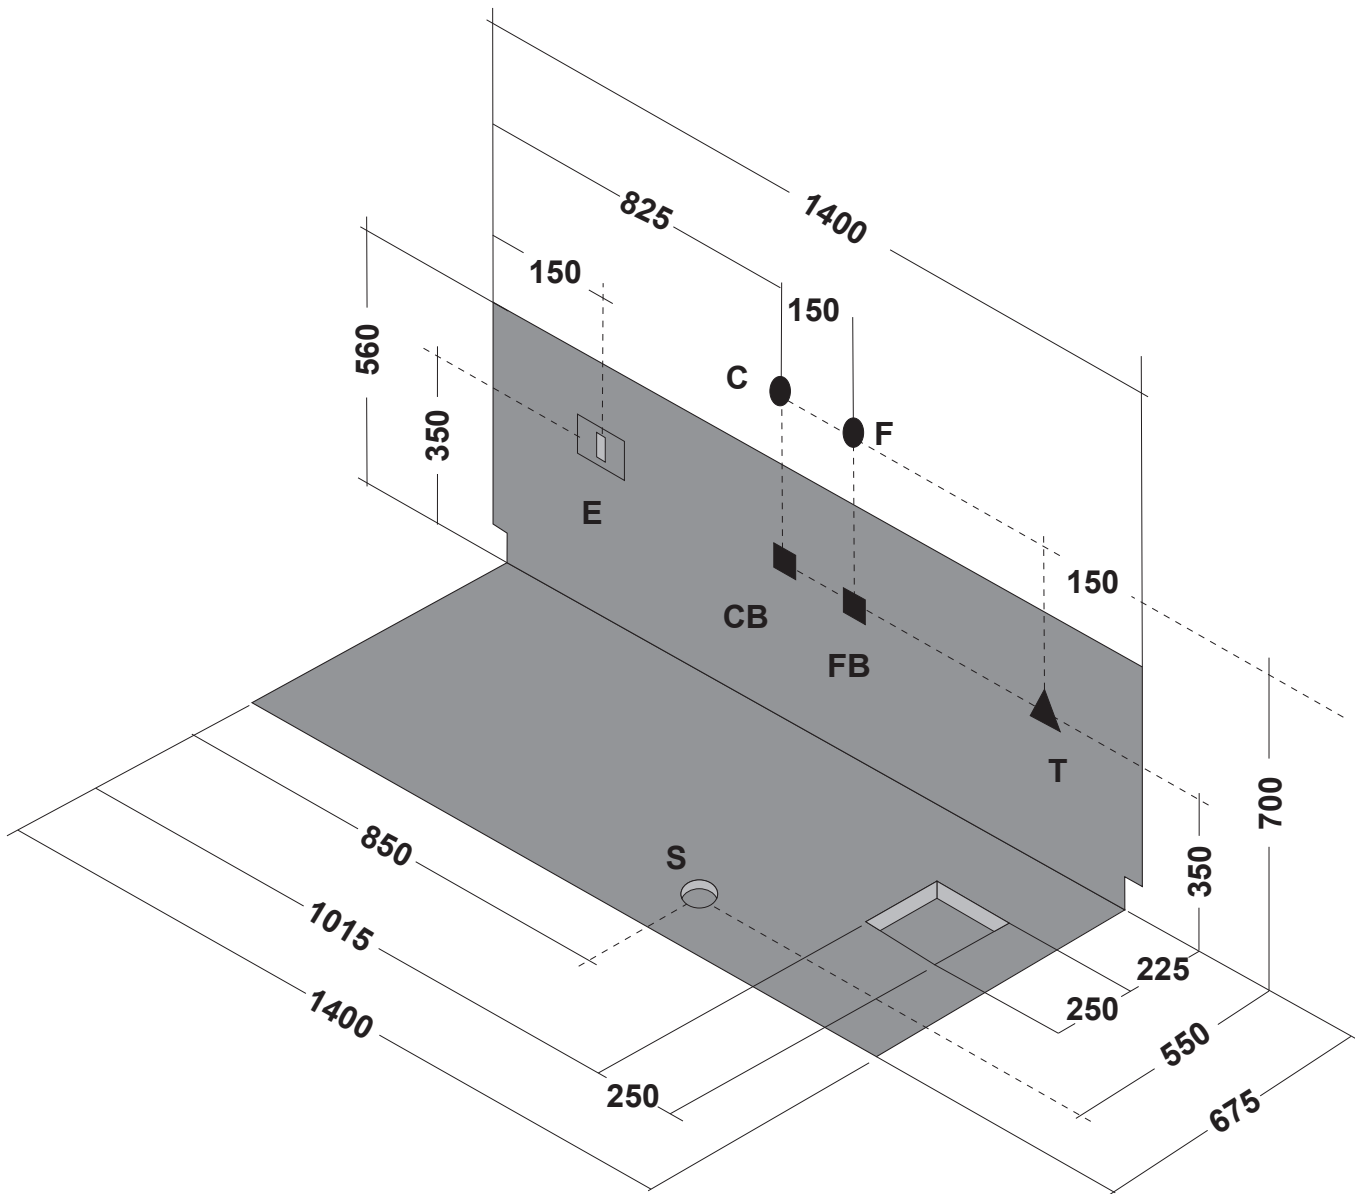

Ingombro vasca proiettato nel muro
 Bath overall dimensions as projected on the wall

VASCA IN ACRILICO DX 140X70

DATI TECNICI

ACRYLIC BATHTUB RX 140X70

TECHNICAL INFO


I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	COMBINAZIONI RUBINETTERIA
<p>N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE</p>	<p>Numero jets: 5</p>	<p>V 220/240</p>	<p>C : Allaccio acqua calda rubinetteria parete: 1/2"</p>	<p>C F : Rubinetteria parete ● ●</p>
<p>Peso netto: Kg 45</p>		<p>HZ 50/60</p>	<p>F : Allaccio acqua fredda rubinetteria parete: 1/2"</p>	<p>CFT: Rubinetteria parete con erogazione troppopieno ● ● ●</p>
<p>Peso spedizione: Kg 58</p>		<p>KW 0.78</p>	<p>CB : Allaccio acqua calda bordo vasca: 1/2"</p>	<p>CB BF: Rubinetteria bordo vasca ■ ■</p>
<p>Volume spedizione: m3 = 0,777</p>		<p>A 5</p>	<p>FB : Allaccio acqua fredda bordo vasca: 1/2"</p>	<p>T : Allaccio miscelatore per erogazione da troppopieno: 1/2"</p>
<p>Contenuto acqua</p>			<p>S : Allaccio scarico incassato a pavimento: 1-1/2"</p>	
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 5</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 45</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ●</p>
<p>total weight with package: Kg 58</p>		<p>KW 0.78</p>	<p>CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
<p>Volume with package: m3 = 0,777</p>		<p>A 5</p>	<p>FB : Bath edge taps outlet for cold water: 1/2"</p>	<p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p>
<p>Water capacity</p>			<p>S : Drainage outlet istalled in the floor: 1-1/2"</p>	
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 5</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 45</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ●</p>
<p>total weight with package: Kg 58</p>		<p>KW 0.78</p>	<p>CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
<p>Volume with package: m3 = 0,777</p>		<p>A 5</p>	<p>FB : Bath edge taps outlet for cold water: 1/2"</p>	<p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p>
<p>Water capacity</p>			<p>S : Drainage outlet istalled in the floor: 1-1/2"</p>	
<p>Water capacity</p>			<p>E : Power outlet for the wirpool IPX5</p>	

VASCA IN ACRILICO SX 140X70


DATI TECNICI

ACRYLIC BATHTUB LX 140X70


TECHNICAL INFO

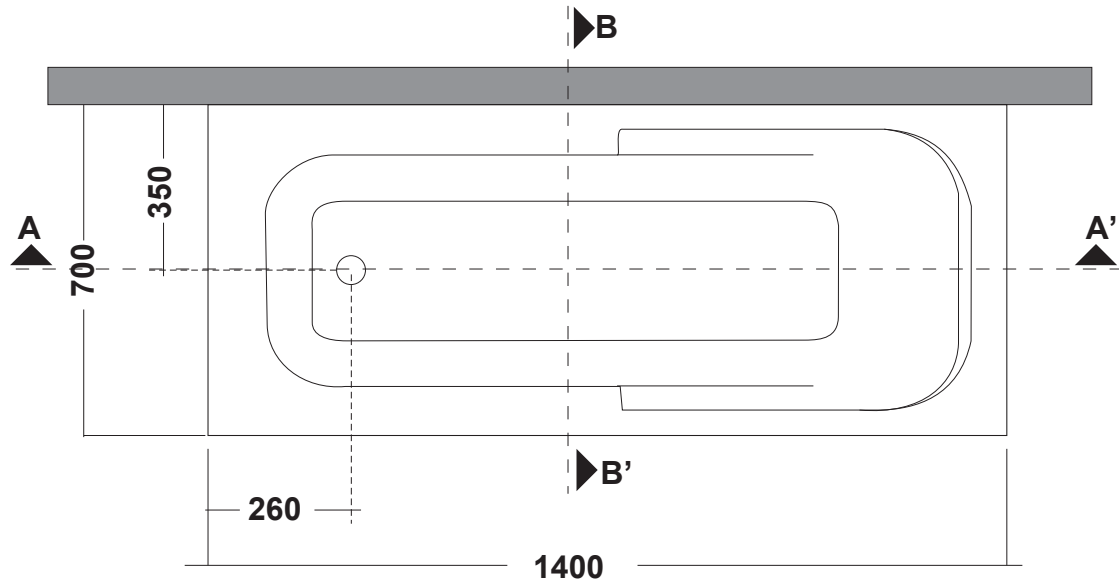

Vista in pianta
plan view

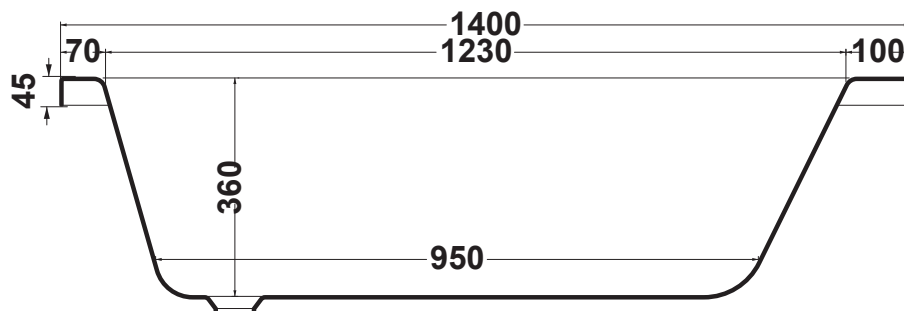

Sezione A/A'
Section A/A'

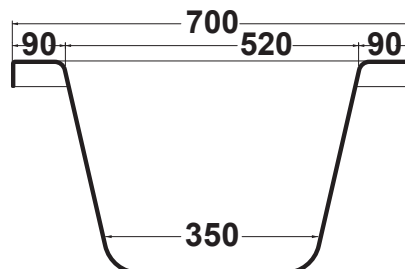


Sezione B/B'
Section B/B'

VASCA IN ACRILICO SX 140X70

ACRYLIC BATHTUB LX 140X70

DATI TECNICI

TECHNICAL INFO

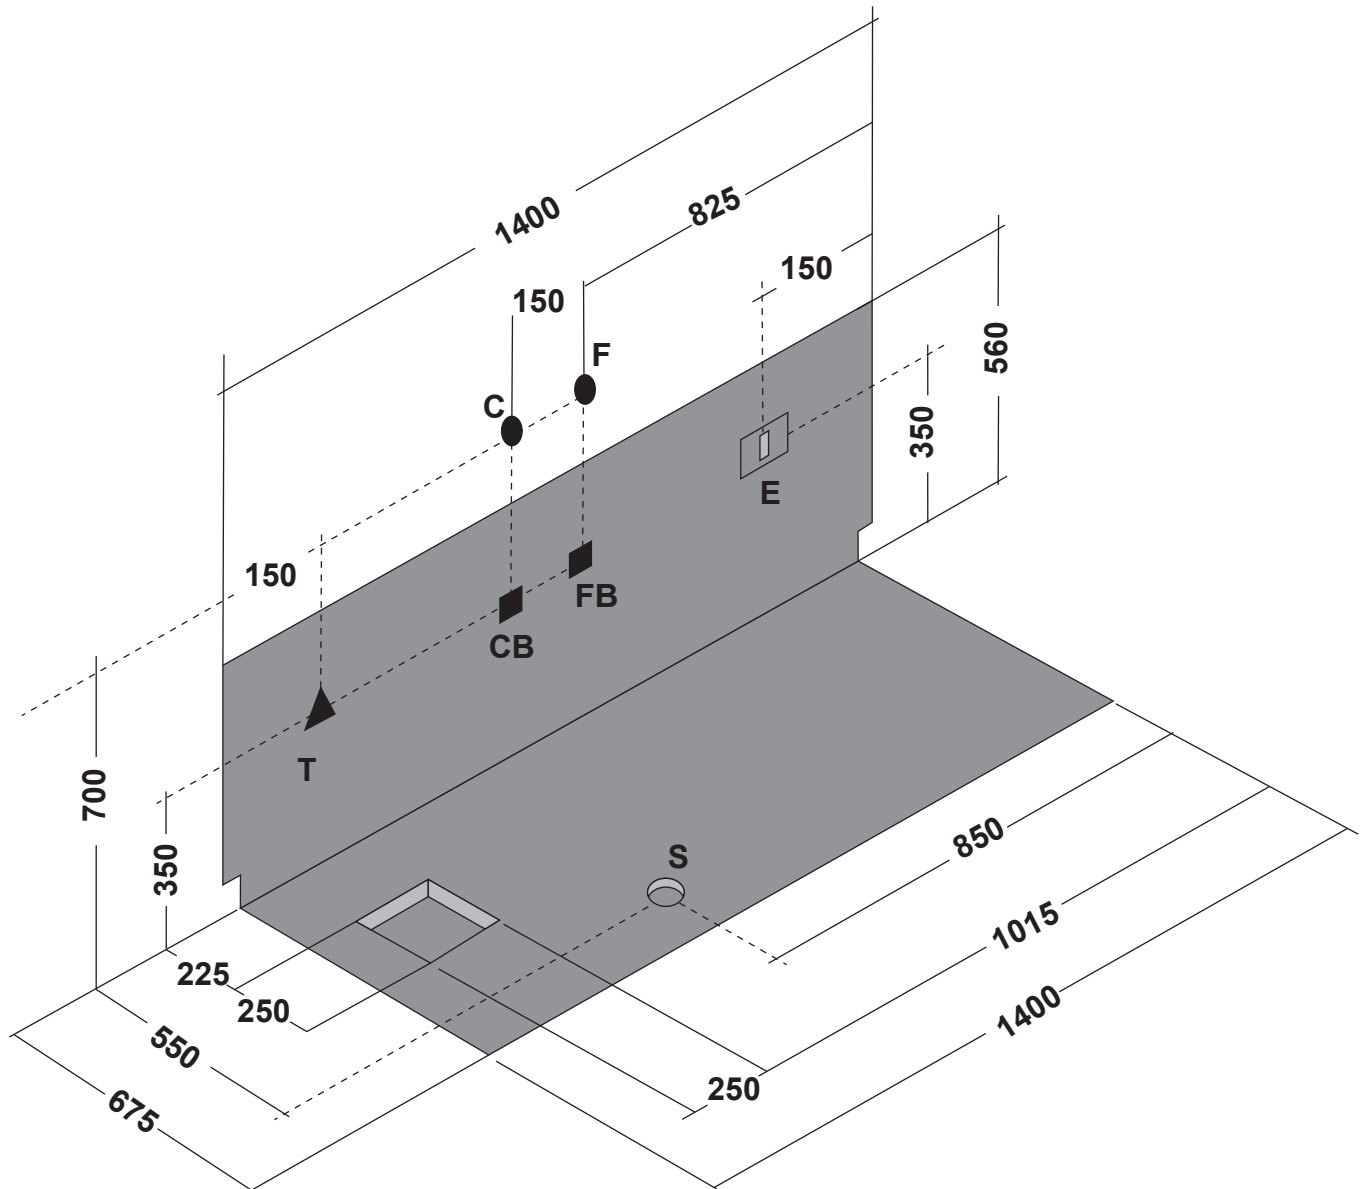

Ingombro vasca proiettato nel muro

Bath overall dimensions as projected on the wall

VASCA IN ACRILICO SX 140X70

DATI TECNICI

ACRYLIC BATHTUB LX 140X70

TECHNICAL INFO


I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	COMBINAZIONI RUBINETTERIA
<p>N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE</p>	<p>Numero jets: 5</p>	<p>V 220/240</p>	<p>C : Allaccio acqua calda rubinetteria parete: 1/2"</p>	<p>C F : Rubinetteria parete ● ●</p>
<p>Peso netto: Kg 45 Peso spedizione: Kg 58 Volume spedizione: m3 = 0,777 Contenuto acqua Lt 110</p>		<p>HZ 50/60</p>	<p>F : Allaccio acqua fredda rubinetteria parete: 1/2" CB : Allaccio acqua calda bordo vasca: 1/2"</p>	<p>CFT: Rubinetteria parete con erogazione troppopieno ● ● ●</p>
		<p>KW 0.78</p>	<p>FB : Allaccio acqua fredda bordo vasca: 1/2" T : Allaccio miscelatore per erogazione da troppopieno: 1/2"</p>	<p>CB BF: Rubinetteria bordo vasca ■ ■</p>
		<p>A 5</p>	<p>S : Allaccio scarico incassato a pavimento: 1-1/2" E : Allaccio elettrico idromassaggio IPX5</p>	
GB	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 5</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 45 total weight with package: Kg 58 Volume with package: m3 = 0,777 Water capacity Lt 110</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2" CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ●</p>
		<p>KW 0.78</p>	<p>FB : Bath edge taps outlet for cold water: 1/2" T : Single outlet for mixed water to supply by overflowing: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
		<p>A 5</p>	<p>S : Drainage outlet istalled in the floor: 1-1/2" E : Power outlet for the wirpool IPX5</p>	
F	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 5</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 45 total weight with package: Kg 58 Volume with package: m3 = 0,777 Water capacity Lt 110</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2" CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ●</p>
		<p>KW 0.78</p>	<p>FB : Bath edge taps outlet for cold water: 1/2" T : Single outlet for mixed water to supply by overflowing: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
		<p>A 5</p>	<p>S : Drainage outlet istalled in the floor: 1-1/2" E : Power outlet for the wirpool IPX5</p>	

VASCA IN ACRILICO DX 150X70


ACRYLIC BATHTUB RX 150X70

DATI TECNICI


TECHNICAL INFO

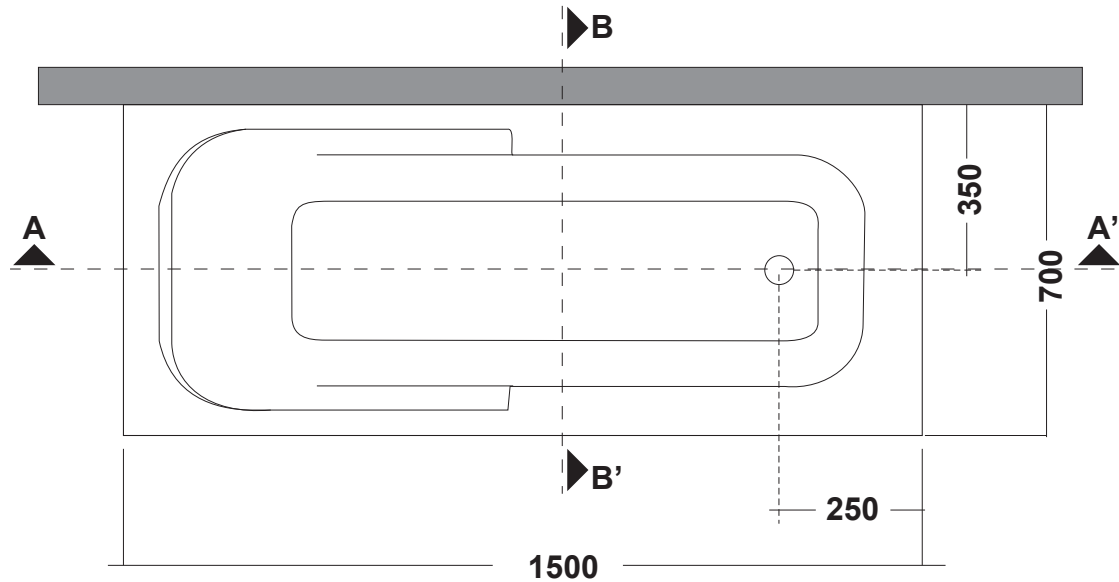

Vista in pianta
plan view

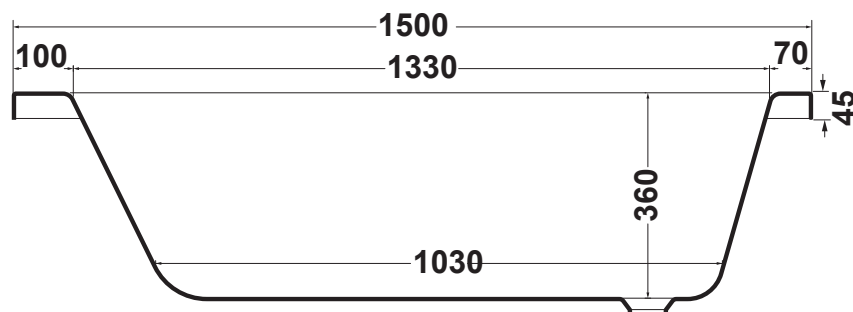

Sezione A/A'
Section A/A'

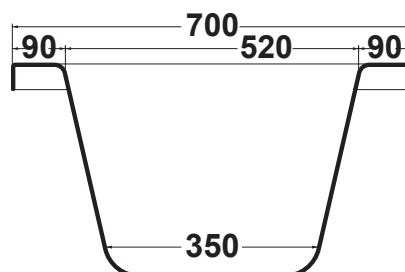


Sezione B/B'
Section B/B'

VASCA IN ACRILICO DX 150X70

ACRYLIC BATHTUB RX 150X70

DATI TECNICI

TECHNICAL INFO

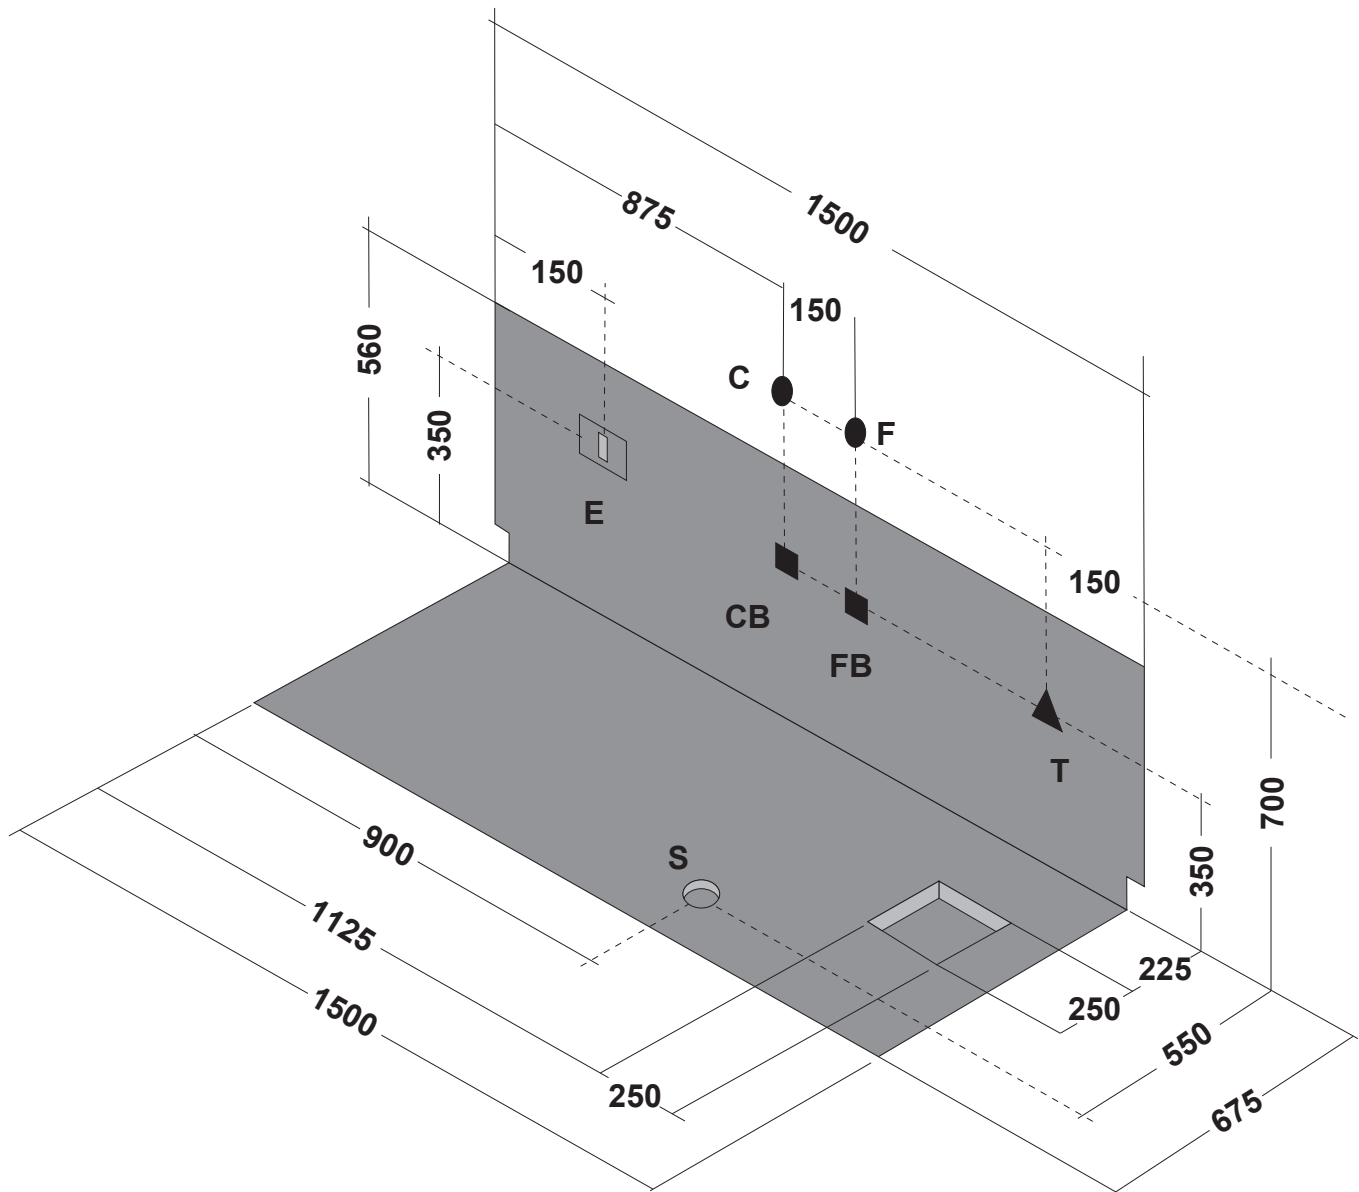

Ingombro vasca proiettato nel muro
 Bath overall dimensions as projected on the wall

VASCA IN ACRILICO DX 150X70

DATI TECNICI

ACRYLIC BATHTUB RX 150X70

TECHNICAL INFO


I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	COMBINAZIONI RUBINETTERIA
<p>N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE</p>	<p>Numero jets: 5</p>	<p>V 220/240</p>	<p>C : Allaccio acqua calda rubinetteria parete: 1/2"</p>	<p>C F : Rubinetteria parete ● ●</p>
<p>Peso netto: Kg 46</p>		<p>HZ 50/60</p>	<p>F : Allaccio acqua fredda rubinetteria parete: 1/2"</p>	<p>CFT: Rubinetteria parete con erogazione troppopieno ● ● ●</p>
<p>Peso spedizione: Kg 59</p>		<p>KW 0.78</p>	<p>CB : Allaccio acqua calda bordo vasca: 1/2"</p>	<p>CB BF: Rubinetteria bordo vasca ■ ■</p>
<p>Volume spedizione: m3 = 0,832</p>		<p>A 5</p>	<p>FB : Allaccio acqua fredda bordo vasca: 1/2"</p>	<p>T : Allaccio miscelatore per erogazione da troppopieno: 1/2"</p>
<p>Contenuto acqua Lt 110</p>			<p>S : Allaccio scarico incassato a pavimento: 1-1/2"</p>	
<p>GB</p>	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 5</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 46</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ●</p>
<p>total weight with package: Kg 59</p>		<p>KW 0.78</p>	<p>CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
<p>Volume with package: m3 = 0,832</p>		<p>A 5</p>	<p>FB : Bath edge taps outlet for cold water: 1/2"</p>	<p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p>
<p>Water capacity Lt 110</p>			<p>S : Drainage outlet istalled in the floor: 1-1/2"</p>	<p>E : Power outlet for the wirpool IPX5</p>
<p>F</p>	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 5</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 46</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ●</p>
<p>total weight with package: Kg 59</p>		<p>KW 0.78</p>	<p>CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
<p>Volume with package: m3 = 0,832</p>		<p>A 5</p>	<p>FB : Bath edge taps outlet for cold water: 1/2"</p>	<p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p>
<p>Water capacity Lt 110</p>			<p>S : Drainage outlet istalled in the floor: 1-1/2"</p>	<p>E : Power outlet for the wirpool IPX5</p>

VASCA IN ACRILICO SX 150X70


DATI TECNICI

ACRYLIC BATHTUB LX 150X70


TECHNICAL INFO

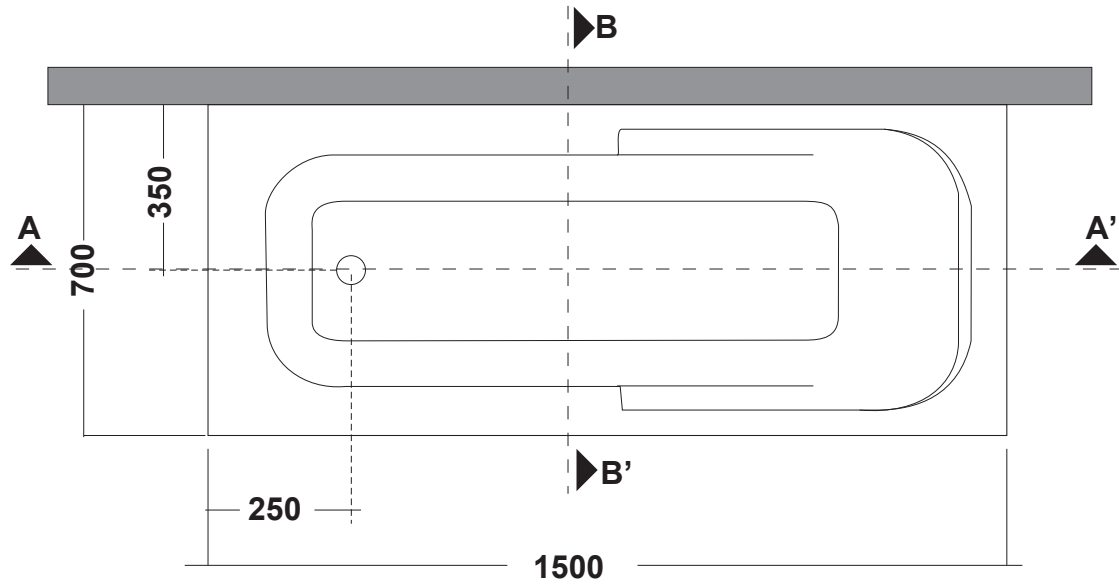

Vista in pianta
plan view

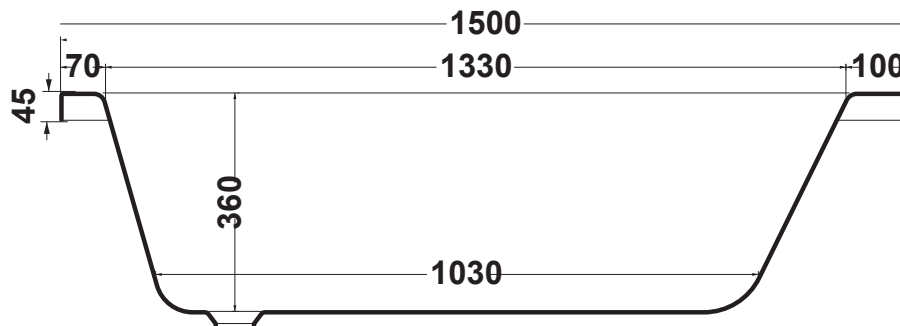

Sezione A/A'
Section A/A'

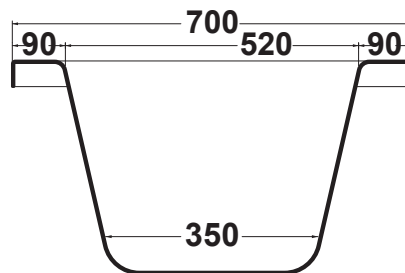


Sezione B/B'
Section B/B'

VASCA IN ACRILICO SX 150X70

DATI TECNICI

ACRYLIC BATHTUB LX 150X70

TECHNICAL INFO

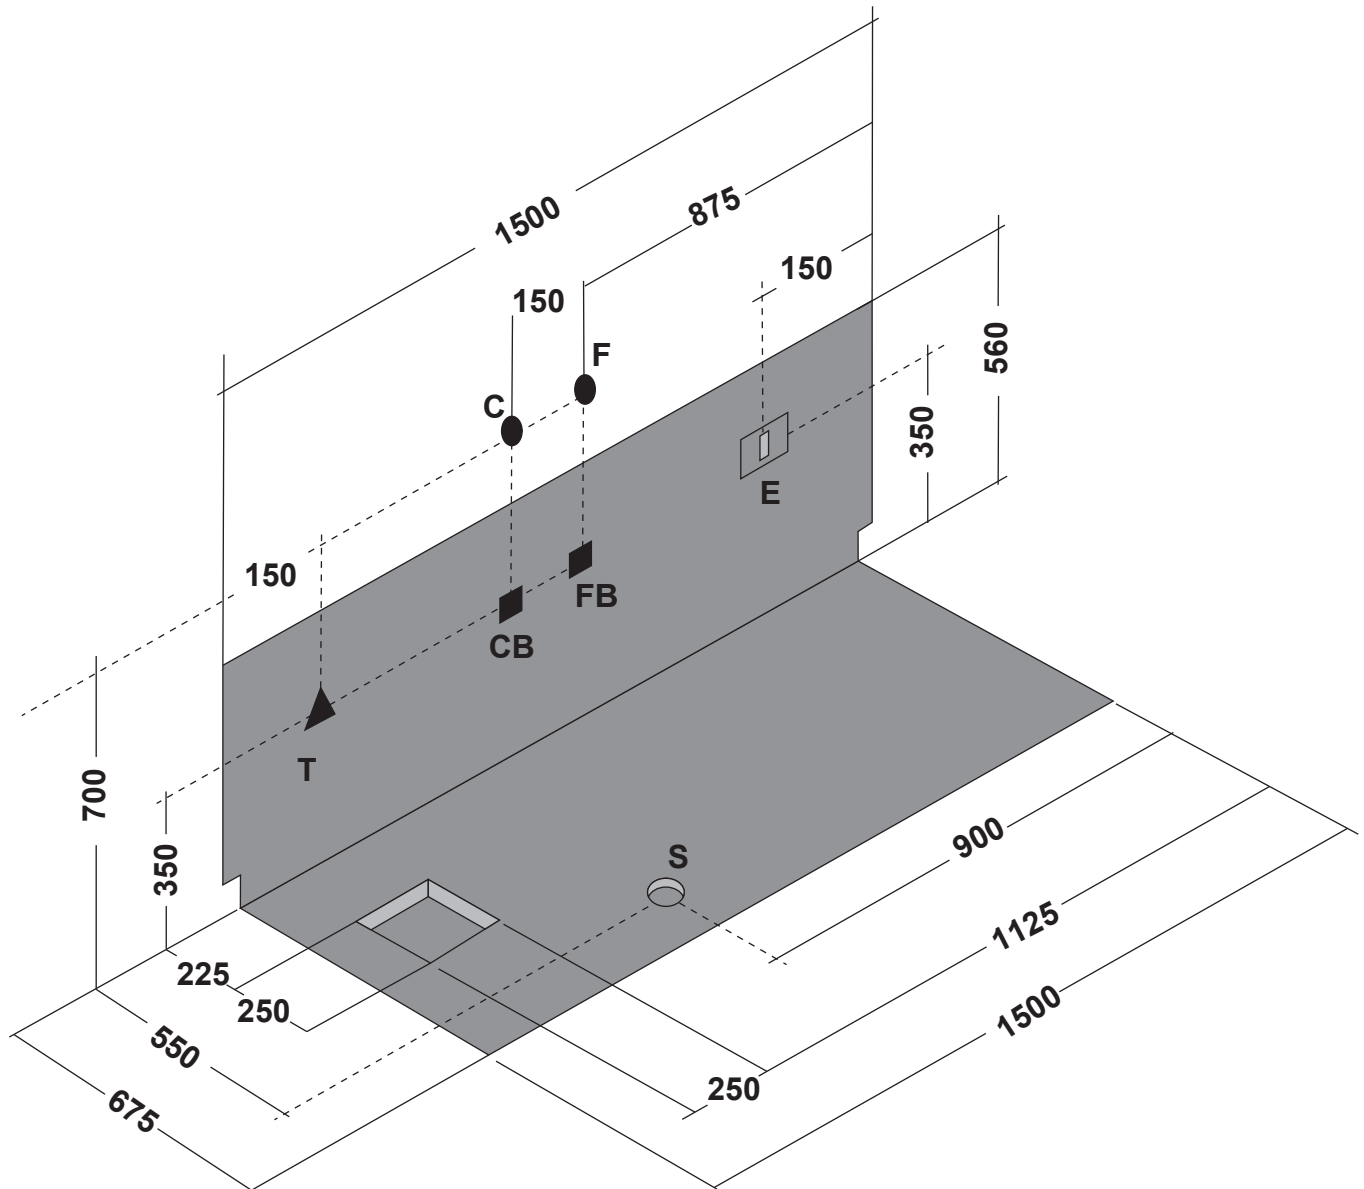

Ingombro vasca proiettato nel muro

Bath overall dimensions as projected on the wall


VASCA IN ACRILICO SX 150X70

DATI TECNICI


ACRYLIC BATHTUB LX 150X70

TECHNICAL INFO


I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	COMBINAZIONI RUBINETTERIA
<p>N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE</p>	<p>Numero jets: 5</p>	<p>V 220/240</p>	<p>C : Allaccio acqua calda rubinetteria parete: 1/2"</p>	<p>C F : Rubinetteria parete ● ●</p>
<p>Peso netto: Kg 46 Peso spedizione: Kg 59 Volume spedizione: m3 = 0,832 Contenuto acqua: Lt 110</p>		<p>HZ 50/60</p>	<p>F : Allaccio acqua fredda rubinetteria parete: 1/2"</p>	<p>CFT: Rubinetteria parete con erogazione troppopieno ● ● ●</p>
		<p>KW 0.78</p>	<p>CB : Allaccio acqua calda bordo vasca: 1/2"</p>	<p>FB : Allaccio acqua fredda bordo vasca: 1/2"</p>
		<p>A 5</p>	<p>T : Allaccio miscelatore per erogazione da troppopieno: 1/2"</p>	<p>S : Allaccio scarico incassato a pavimento: 1-1/2"</p>
			<p>E : Allaccio elettrico idromassaggio IPX5</p>	<p>CB BF: Rubinetteria bordo vasca ■ ■</p>
GB	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALREADY TILED</p>	<p>Numero jets: 5</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 46 total weight with package: Kg 59 Volume with package: m3 = 0,832 Water capacity: Lt 110</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ●</p>
		<p>KW 0.78</p>	<p>CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>FB : Bath edge taps outlet for cold water: 1/2"</p>
		<p>A 5</p>	<p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p>	<p>S : Drainage outlet installed in the floor: 1-1/2"</p>
			<p>E : Power outlet for the whirlpool IPX5</p>	<p>CB BF: Bath edge taps ■ ■</p>
F	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALREADY TILED</p>	<p>Numero jets: 5</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 46 total weight with package: Kg 59 Volume with package: m3 = 0,832 Water capacity: Lt 110</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ●</p>
		<p>KW 0.78</p>	<p>CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>FB : Bath edge taps outlet for cold water: 1/2"</p>
		<p>A 5</p>	<p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p>	<p>S : Drainage outlet installed in the floor: 1-1/2"</p>
			<p>E : Power outlet for the whirlpool IPX5</p>	<p>CB BF: Bath edge taps ■ ■</p>

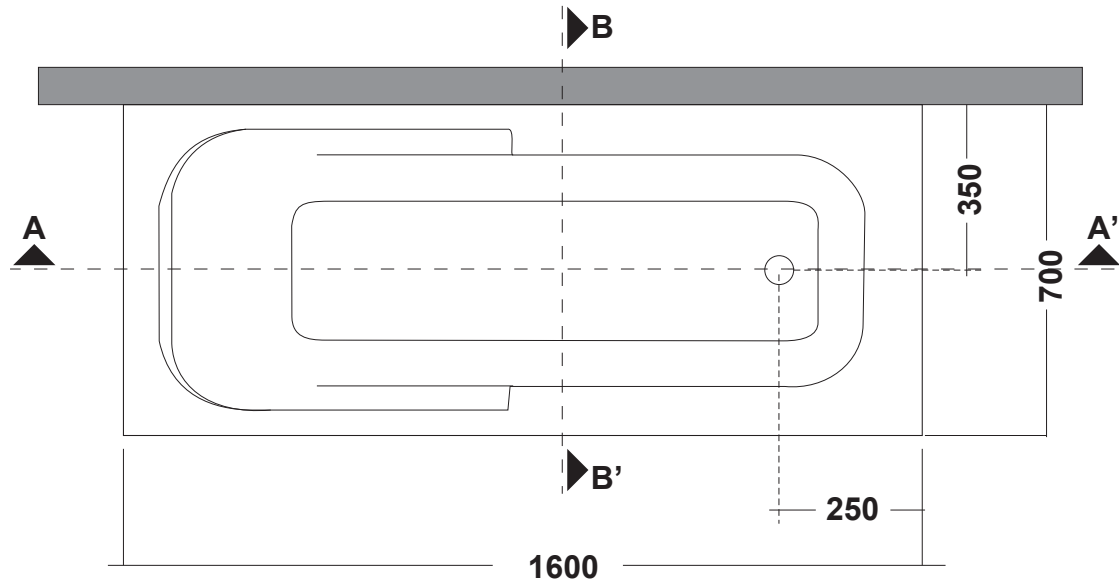


Vista in pianta
plan view

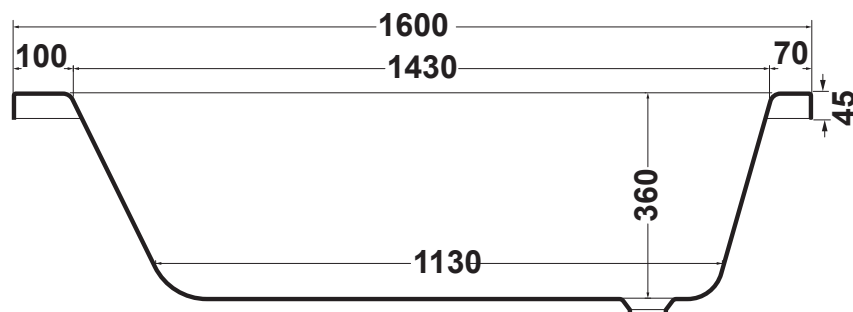

Sezione A/A'
Section A/A'

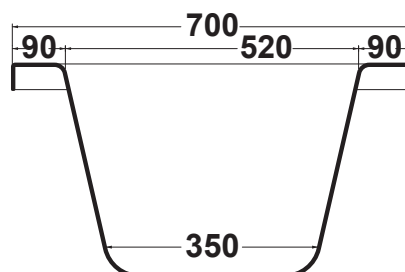

Sezione B/B'
Section B/B'

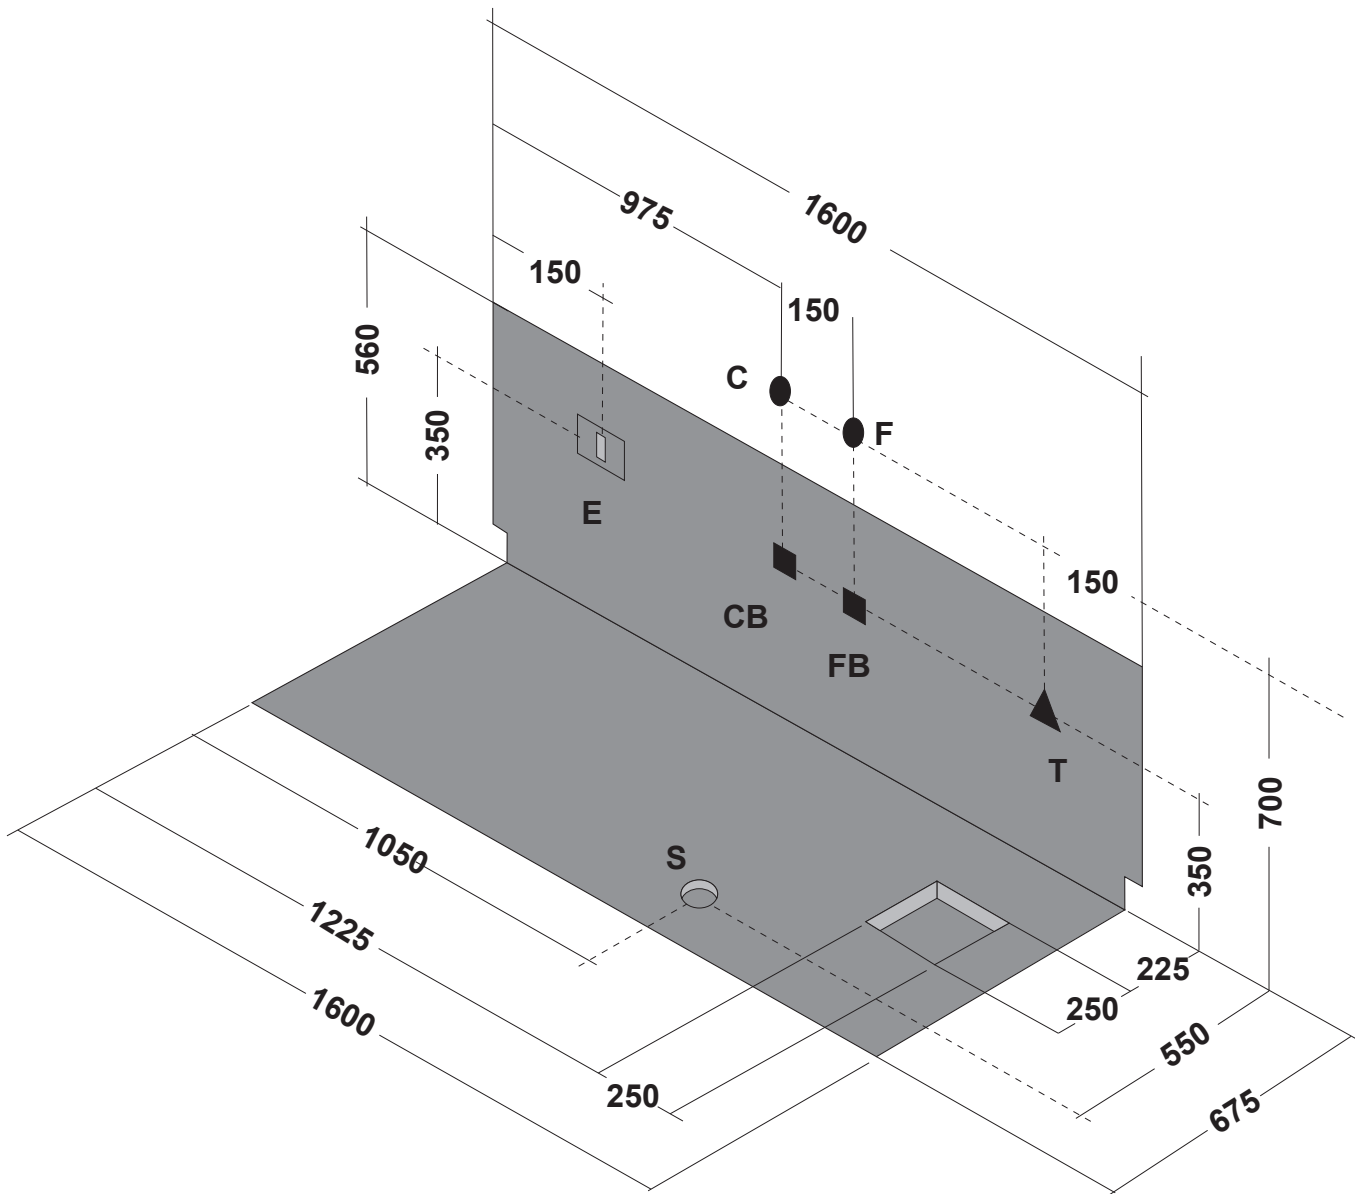

Ingombro vasca proiettato nel muro

Bath overall dimensions as projected on the wall

VASCA IN ACRILICO DX 160X70

DATI TECNICI

ACRYLIC BATHTUB RX 140X70

TECHNICAL INFO


I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	COMBINAZIONI RUBINETTERIA
<p>N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE</p> <p>Peso netto: Kg 47 Peso spedizione: Kg 61 Volume spedizione: m3 = 0,890 Contenuto acqua: Lt 120</p>	Numero jets: 6	V 220/240	C : Allaccio acqua calda rubinetteria parete: 1/2"	C F : Rubinetteria parete ● ●
		HZ 50/60	F : Allaccio acqua fredda rubinetteria parete: 1/2"	
		KW 0.78	CB : Allaccio acqua calda bordo vasca: 1/2"	CB BF: Rubinetteria bordo vasca ■ ■
		A 4,1/3,9	FB : Allaccio acqua fredda bordo vasca: 1/2"	
			T : Allaccio miscelatore per erogazione da troppopieno: 1/2"	
			S : Allaccio scarico incassato a pavimento: 1-1/2"	
			E : Allaccio elettrico idromassaggio IPX5	
GB	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p> <p>Net weight: Kg 47 total weight with package: Kg 61 Volume with package: m3 = 0,890 Water capacity: Lt 120</p>	Numero jets: 6	V 220/240	C : Wall taps outlet for hot water: 1/2"	C F : Wall taps ● ●
		HZ 50/60	F : Wall taps outlet for cold water: 1/2"	
		KW 0.78	CB : Bath edge taps outlet for hot water: 1/2"	CB BF: Bath edge taps ■ ■
		A 4,1/3,9	FB : Bath edge taps outlet for cold water: 1/2"	
			T : Single outlet for mixed water to supply by overflowing: 1/2"	
			S : Drainage outlet istalled in the floor: 1-1/2"	
			E : Power outlet for the wirpool IPX5	
F	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p> <p>Net weight: Kg 47 total weight with package: Kg 61 Volume with package: m3 = 0,890 Water capacity: Lt 120</p>	Numero jets: 6	V 220/240	C : Wall taps outlet for hot water: 1/2"	C F : Wall taps ● ●
		HZ 50/60	F : Wall taps outlet for cold water: 1/2"	
		KW 0.78	CB : Bath edge taps outlet for hot water: 1/2"	CB BF: Bath edge taps ■ ■
		A 4,1/3,9	FB : Bath edge taps outlet for cold water: 1/2"	
			T : Single outlet for mixed water to supply by overflowing: 1/2"	
			S : Drainage outlet istalled in the floor: 1-1/2"	
			E : Power outlet for the wirpool IPX5	

VASCA IN ACRILICO SX 160X70


ACRYLIC BATHTUB LX 160X70

DATI TECNICI


TECHNICAL INFO

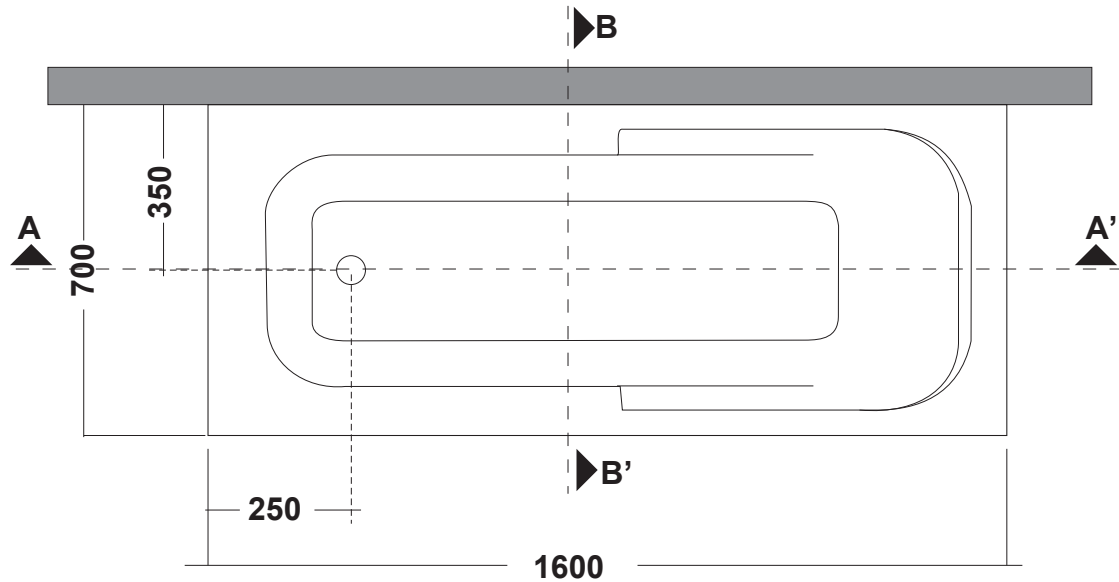

Vista in pianta
plan view

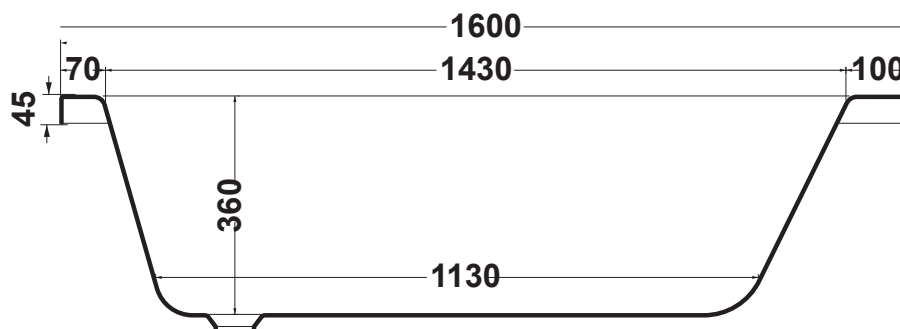

Sezione A/A'
Section A/A'

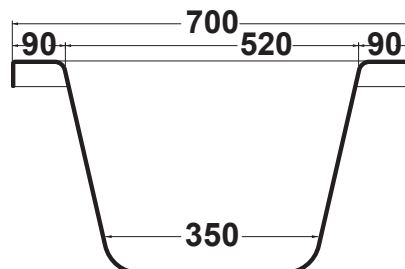


Sezione B/B'
Section B/B'

VASCA IN ACRILICO SX 160X70

ACRYLIC BATHTUB LX 160X70

DATI TECNICI

TECHNICAL INFO

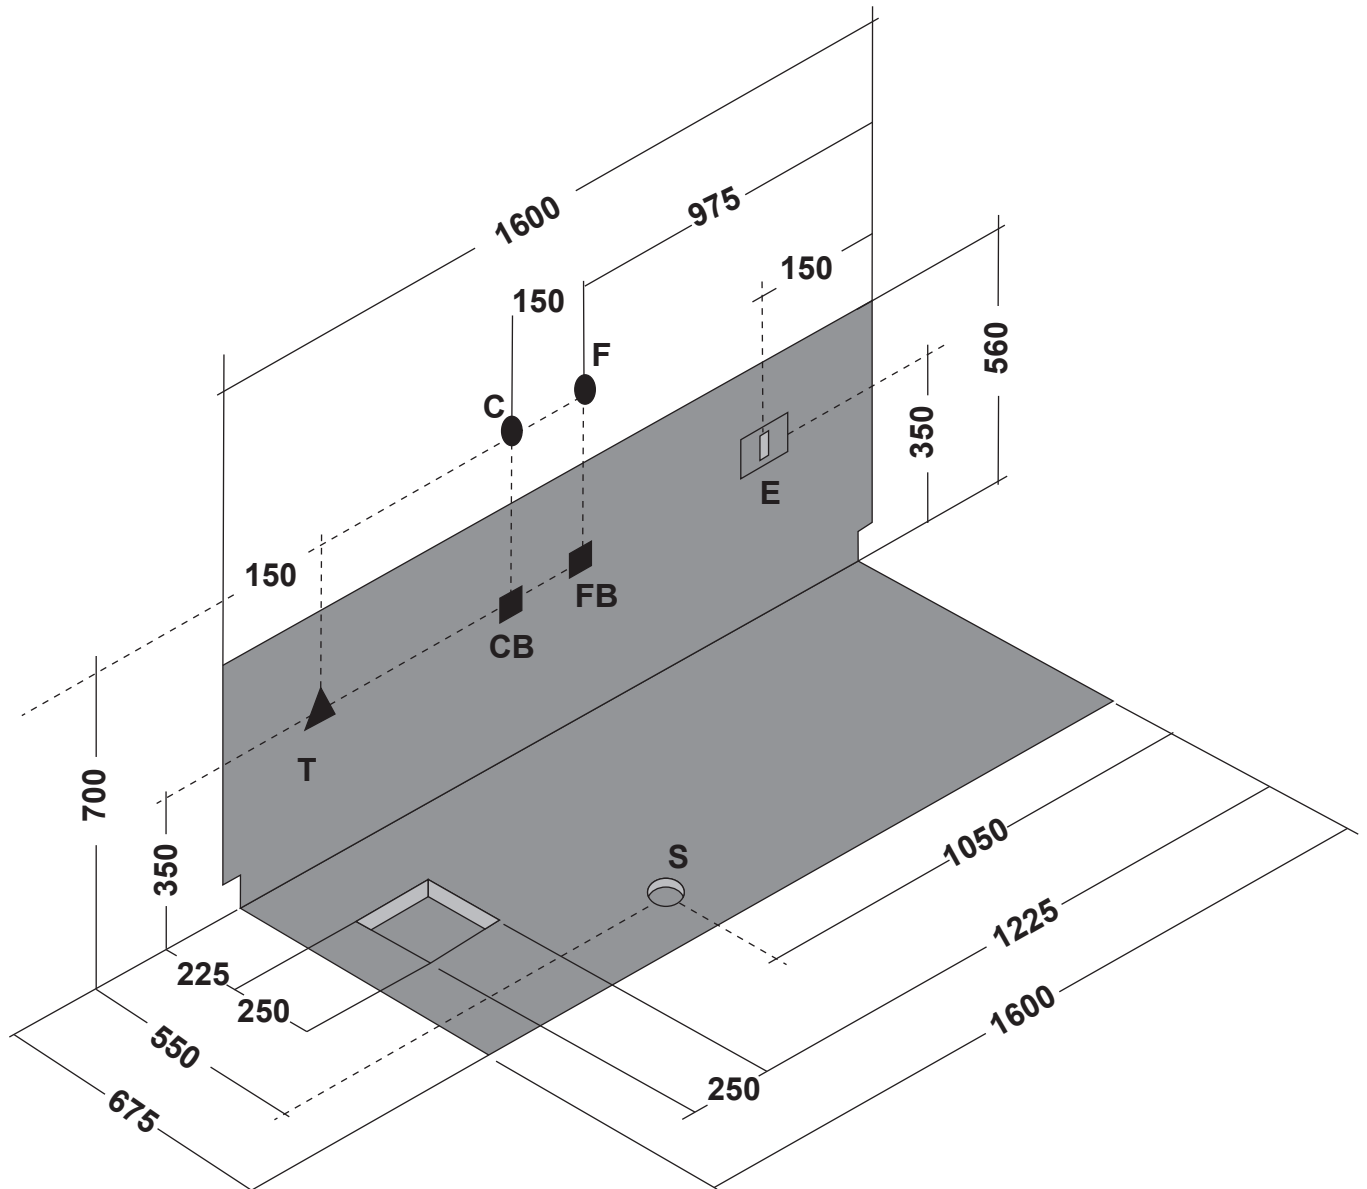

Ingombro vasca proiettato nel muro

Bath overall dimensions as projected on the wall

VASCA IN ACRILICO SX 160X70

ACRYLIC BATHTUB LX 160X70

DATI TECNICI

TECHNICAL INFO


I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	COMBINAZIONI RUBINETTERIA
<p>N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE</p>	<p>Numero jets: 6</p>	<p>V 220/240</p>	<p>C : Allaccio acqua calda rubinetteria parete: 1/2"</p>	<p>C F : Rubinetteria parete ● ●</p>
<p>Peso netto: Kg 47</p>		<p>HZ 50/60</p>	<p>F : Allaccio acqua fredda rubinetteria parete: 1/2"</p>	<p>CFT: Rubinetteria parete con erogazione troppopieno ● ● ●</p>
<p>Peso spedizione: Kg 61</p>		<p>KW 0.78</p>	<p>CB : Allaccio acqua calda bordo vasca: 1/2"</p>	<p>CB BF: Rubinetteria bordo vasca ■ ■</p>
<p>Volume spedizione: m3 = 0,890 Contenuto acqua Lt 120</p>		<p>A 4,1/3,9</p>	<p>FB : Allaccio acqua fredda bordo vasca: 1/2"</p> <p>T : Allaccio miscelatore per erogazione da troppopieno: 1/2"</p> <p>S : Allaccio scarico incassato a pavimento: 1-1/2"</p> <p>E : Allaccio elettrico idromassaggio IPX5</p>	
GB	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 6</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 47</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ●</p>
<p>total weight with package: Kg 61</p>		<p>KW 0.78</p>	<p>CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
<p>Volume with package: m3 = 0,890 Water capacity Lt 120</p>		<p>A 4,1/3,9</p>	<p>FB : Bath edge taps outlet for cold water: 1/2"</p> <p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p> <p>S : Drainage outlet istalled in the floor: 1-1/2"</p> <p>E : Power outlet for the wirpool IPX5</p>	
F	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 6</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 47</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ●</p>
<p>total weight with package: Kg 61</p>		<p>KW 0.78</p>	<p>CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
<p>Volume with package: m3 = 0,890 Water capacity Lt 120</p>		<p>A 4,1/3,9</p>	<p>FB : Bath edge taps outlet for cold water: 1/2"</p> <p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p> <p>S : Drainage outlet istalled in the floor: 1-1/2"</p> <p>E : Power outlet for the wirpool IPX5</p>	

VASCA IN ACRILICO DX 170X70


ACRYLIC BATHTUB RX 170X70

DATI TECNICI


TECHNICAL INFO

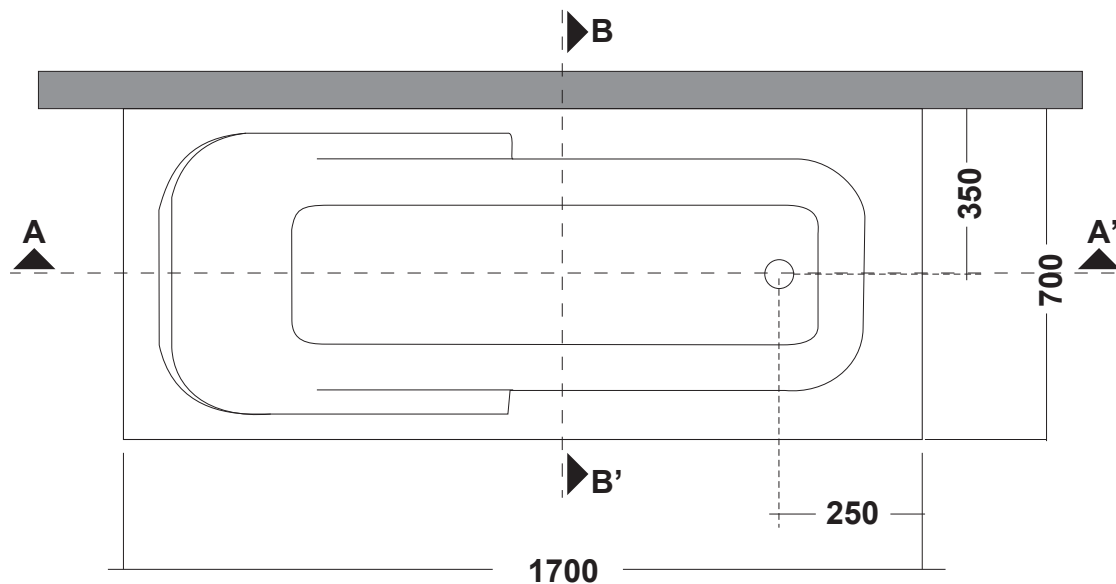


Vista in pianta
plan view

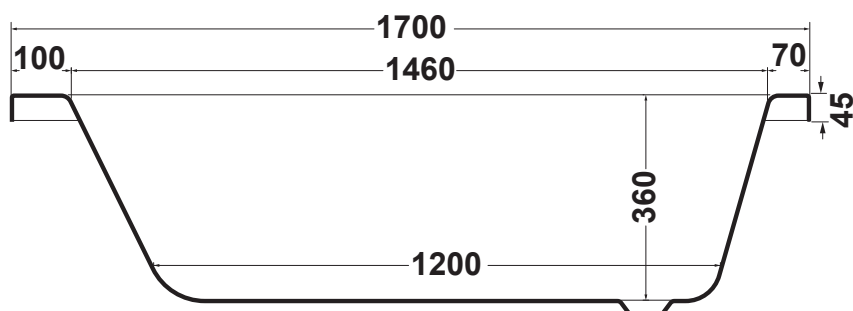

Sezione A/A'
Section A/A'

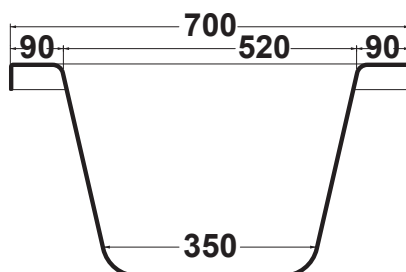

Sezione B/B'
Section B/B'

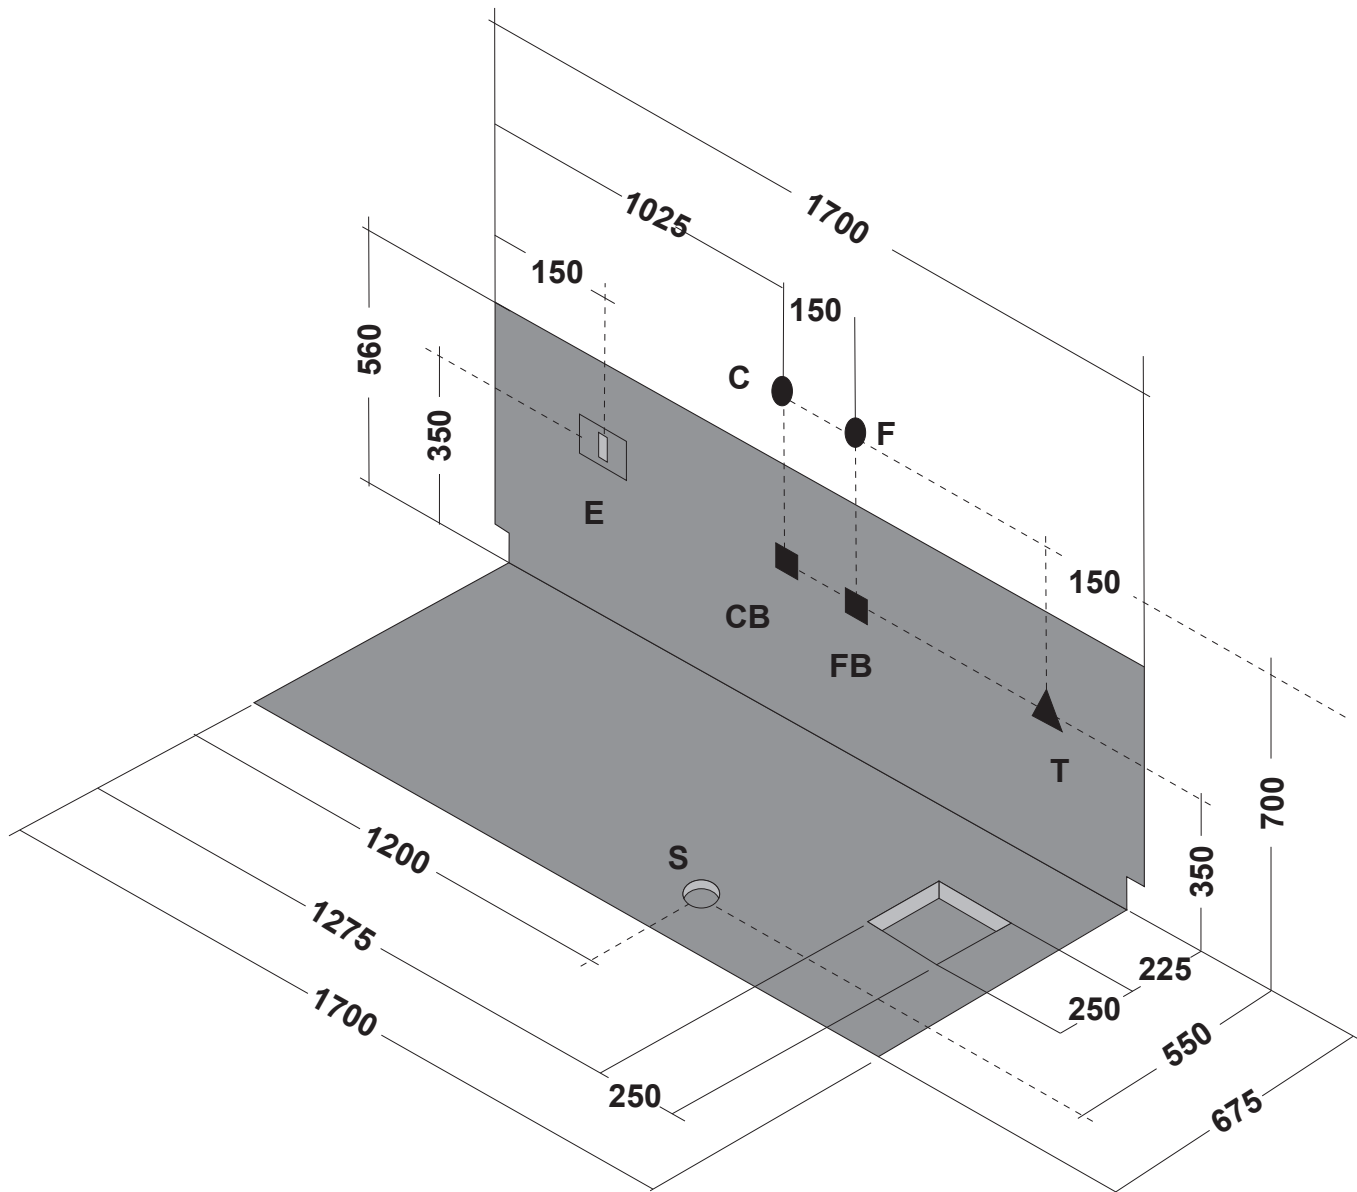

Ingombro vasca proiettato nel muro
 Bath overall dimensions as projected on the wall


VASCA IN ACRILICO DX 170X70

DATI TECNICI


ACRYLIC BATHTUB RX 170X70

TECHNICAL INFO


I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	COMBINAZIONI RUBINETTERIA
<p>N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE</p> <p>Peso netto: Kg 55 Peso spedizione: Kg 62 Volume spedizione: m3 = 0,936 Contenuto acqua: Lt 130</p>	Numero jets: 6	V 220/240	C : Allaccio acqua calda rubinetteria parete: 1/2"	C F : Rubinetteria parete ● ●
		HZ 50/60	F : Allaccio acqua fredda rubinetteria parete: 1/2"	CFT: Rubinetteria parete con erogazione troppopieno ● ● ●
		KW 0.78	CB : Allaccio acqua calda bordo vasca: 1/2"	CB BF: Rubinetteria bordo vasca ■ ■
		A 4,5	FB : Allaccio acqua fredda bordo vasca: 1/2"	
			T : Allaccio miscelatore per erogazione da troppopieno: 1/2"	
			S : Allaccio scarico incassato a pavimento: 1-1/2"	
			E : Allaccio elettrico idromassaggio IPX5	
GB	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p> <p>Net weight: Kg 55 total weight with package: Kg 62 Volume with package: m3 = 0,936 Water capacity: Lt 130</p>	Numero jets: 6	V 220/240	C : Wall taps outlet for hot water: 1/2"	C F : Wall taps ● ●
		HZ 50/60	F : Wall taps outlet for cold water: 1/2"	CFT: Wall taps with water supply by overflowing ● ● ●
		KW 0.78	CB : Bath edge taps outlet for hot water: 1/2"	CB BF: Bath edge taps ■ ■
		A 4,5	FB : Bath edge taps outlet for cold water: 1/2"	
			T : Single outlet for mixed water to supply by overflowing: 1/2"	
			S : Drainage outlet installed in the floor: 1-1/2"	
			E : Power outlet for the wirpool IPX5	
F	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p> <p>Net weight: Kg 55 total weight with package: Kg 62 Volume with package: m3 = 0,936 Water capacity: Lt 130</p>	Numero jets: 6	V 220/240	C : Wall taps outlet for hot water: 1/2"	C F : Wall taps ● ●
		HZ 50/60	F : Wall taps outlet for cold water: 1/2"	CFT: Wall taps with water supply by overflowing ● ● ●
		KW 0.78	CB : Bath edge taps outlet for hot water: 1/2"	CB BF: Bath edge taps ■ ■
		A 4,5	FB : Bath edge taps outlet for cold water: 1/2"	
			T : Single outlet for mixed water to supply by overflowing: 1/2"	
			S : Drainage outlet installed in the floor: 1-1/2"	
			E : Power outlet for the wirpool IPX5	

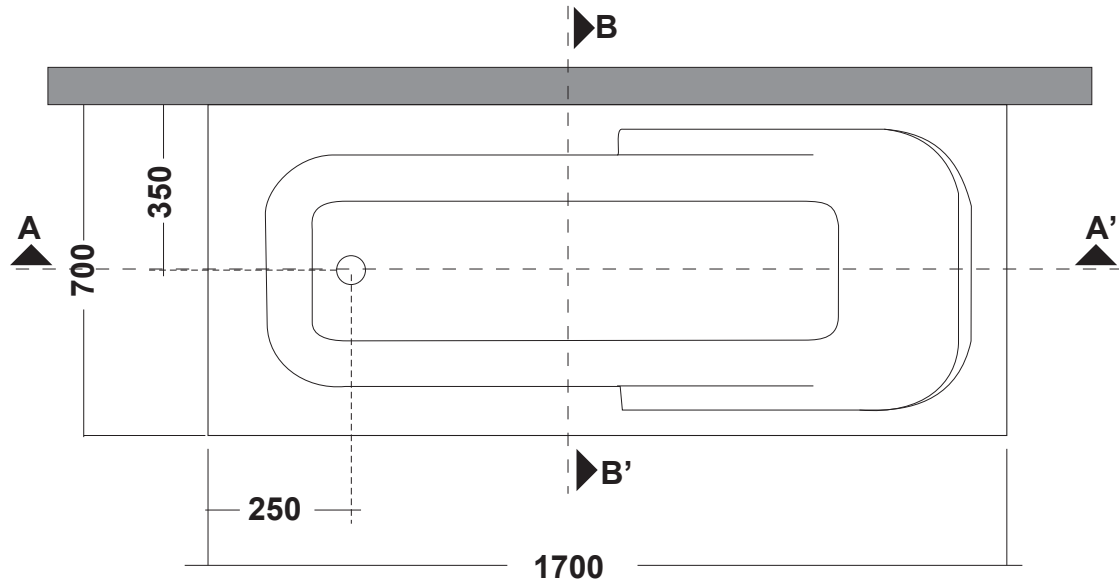


Vista in pianta
plan view

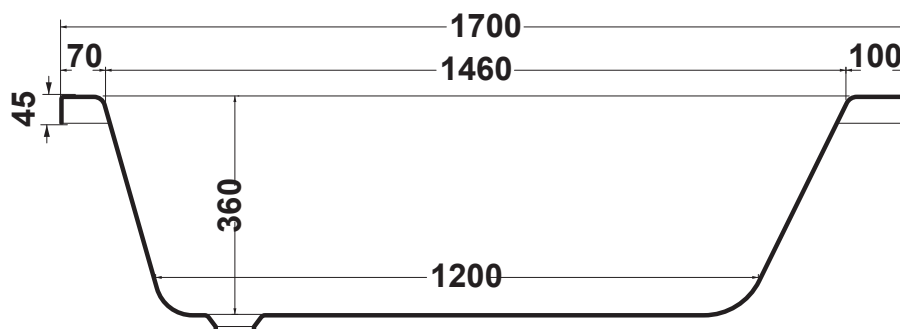

Sezione A/A'
Section A/A'

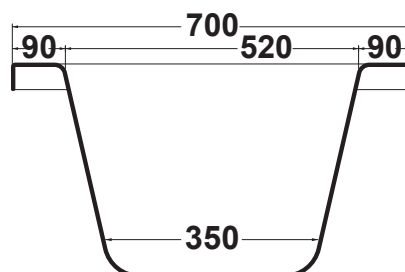

Sezione B/B'
Section B/B'

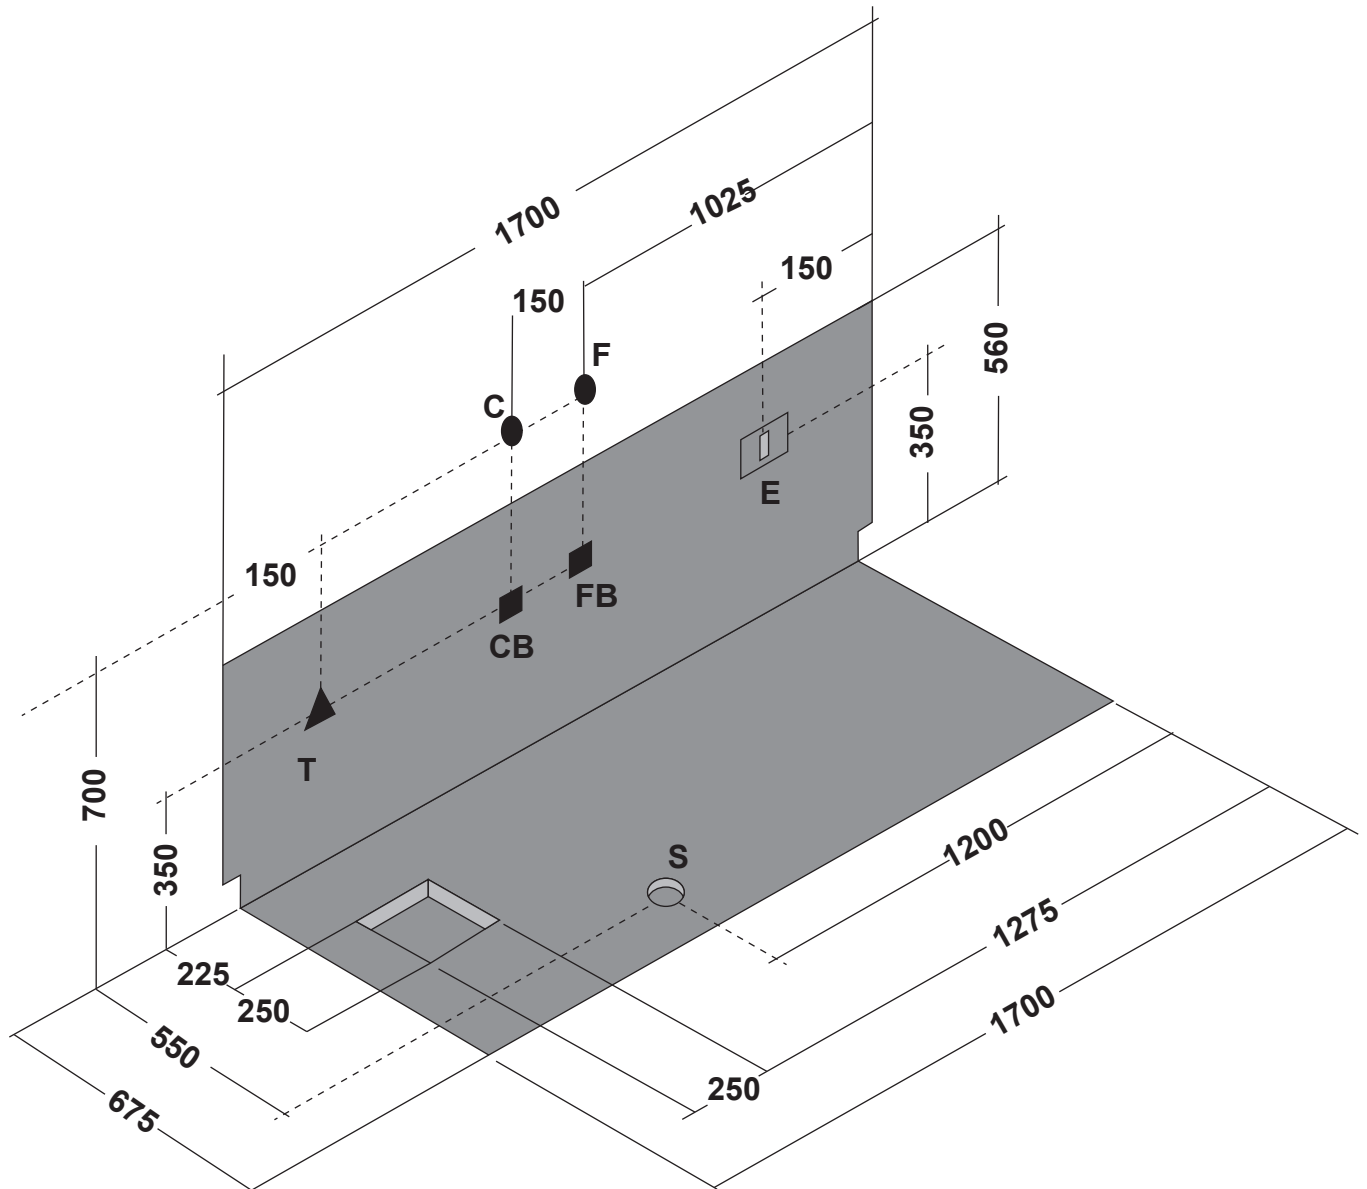

Ingombro vasca proiettato nel muro

Bath overall dimensions as projected on the wall

VASCA IN ACRILICO SX 170X70

DATI TECNICI

ACRYLIC BATHTUB LX 170X70

TECHNICAL INFO

I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	COMBINAZIONI RUBINETTERIA
<p>N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE</p>	<p>Numero jets: 6</p>	<p>V 220/240</p>	<p>C : Allaccio acqua calda rubinetteria parete: 1/2"</p>	<p>C F : Rubinetteria parete ● ●</p>
<p>Peso netto: Kg 55</p>		<p>HZ 50/60</p>	<p>F : Allaccio acqua fredda rubinetteria parete: 1/2"</p>	<p>CFT: Rubinetteria parete con erogazione troppopieno ● ● ●</p>
<p>Peso spedizione: Kg 62</p>		<p>KW 0.78</p>	<p>CB : Allaccio acqua calda bordo vasca: 1/2"</p>	<p>CB BF: Rubinetteria bordo vasca ■ ■</p>
<p>Volume spedizione: m3 = 0,936</p>		<p>A 4,5</p>	<p>FB : Allaccio acqua fredda bordo vasca: 1/2"</p>	<p>T : Allaccio miscelatore per erogazione da troppopieno: 1/2"</p>
<p>Contenuto acqua Lt 130</p>			<p>S : Allaccio scarico incassato a pavimento: 1-1/2"</p>	
			<p>E : Allaccio elettrico idromassaggio IPX5</p>	
GB	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 6</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 55</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ●</p>
<p>total weight with package: Kg 62</p>		<p>KW 0.78</p>	<p>CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
<p>Volume with package: m3 = 0,936</p>		<p>A 4,5</p>	<p>FB : Bath edge taps outlet for cold water: 1/2"</p>	<p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p>
<p>Water capacity Lt 130</p>			<p>S : Drainage outlet istalled in the floor: 1-1/2"</p>	
			<p>E : Power outlet for the wirpool IPX5</p>	
F	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION
<p>N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED</p>	<p>Numero jets: 6</p>	<p>V 220/240</p>	<p>C : Wall taps outlet for hot water: 1/2"</p>	<p>C F : Wall taps ● ●</p>
<p>Net weight: Kg 55</p>		<p>HZ 50/60</p>	<p>F : Wall taps outlet for cold water: 1/2"</p>	<p>CFT: Wall taps with water supply by overflowing ● ● ●</p>
<p>total weight with package: Kg 62</p>		<p>KW 0.78</p>	<p>CB : Bath edge taps outlet for hot water: 1/2"</p>	<p>CB BF: Bath edge taps ■ ■</p>
<p>Volume with package: m3 = 0,936</p>		<p>A 4,5</p>	<p>FB : Bath edge taps outlet for cold water: 1/2"</p>	<p>T : Single outlet for mixed water to supply by overflowing: 1/2"</p>
<p>Water capacity Lt 130</p>			<p>S : Drainage outlet istalled in the floor: 1-1/2"</p>	
			<p>E : Power outlet for the wirpool IPX5</p>	